

# SRV



## General Description


The SRV is a DIN rail mounted module type temperature controller. Dual loop control can be performed with a single compact module. A maximum of 31 modules can be connected for 62-loop control. Power supply and communication lines are via a connector on the side, no wiring required. Distributed installation via RS-485 is possible, enabling multi-zone distributed control system in a compact size.

## Features

- ☆ Multi-zone space-saving and less wiring
- ☆ Safe, and easy to use
- ☆ Heat/Cool action
- ☆ Heater/Loop break alarms
- ☆ DIN rail mounting

### Space-Saving and Less Wiring


Dual loop control can be performed with a single compact module.  
Separated installation by control zones is possible. Wiring to sensors and output devices is minimized.  
Modules can be installed separately inside a control panel or a machine to reduce the physical size of the housing.

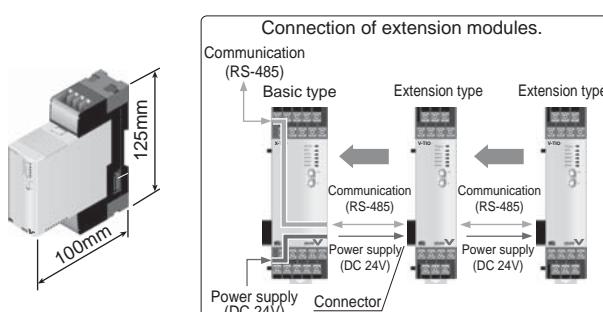

### Safe, and Easy to Use


Hinged terminal cover is supplied as standard.

Interleave terminal arrangement for easy wiring.




### Module Configuration


Temperature Control Module  
(Basic Type)  
V-TIO-A




Temperature Control Module  
(Extension Type)  
V-TIO-B



Heat/Cool type  
Temperature Control Module  
(Basic Type)  
V-TIO-C



Heat/Cool type  
Temperature Control Module  
(Extension Type)  
V-TIO-D



V-TIO-A and V-TIO-B (or V-TIO-C and V-TIO-D) have similar control functions and specifications.

V-TIO-A and V-TIO-B can accept maximum of two inputs.  
(A single input only for V-TIO-C and V-TIO-D).

## Specifications

### Input

#### Number of inputs

- 2 points (V-TIO-A/B)
- 1 point (V-TIO-C/D)
- 2 points type : Isolated between each channel (Only thermocouple)

#### Input

- a) Thermocouple, DC low voltage group
  - Thermocouple : K, J, R, S, B, E, T, N (JIS/IEC), PLII (NBS), W5Re/W26Re (ASTM)
  - Input impedance : Approx.  $1\text{M}\Omega$
  - Influence of external resistance : Approx.  $0.15\mu\text{V}/\Omega$
  - Input break action : Up-scale
  - DC Low voltage : 0-100mV DC
  - Input break action : Up-scale
- b) RTD group
  - Pt100 (JIS/IEC), JPt100 (JIS)
  - Maximum  $10\Omega$  per wire
  - Input break action : Up-scale
- c) DC High voltage, DC current group
  - DC High voltage : 0 to 5V DC, 1 to 5V DC, 0 to 10V DC
  - Input break action : Value around 0V
  - DC current : 0 to 20mA DC, 4 to 20mA DC
  - Input impedance :  $250\Omega$
  - Input break action : Value around 0V

#### Sampling Time

0.5 sec

#### PV Bias

-span to +span

#### Digital Filter

1 to 100 sec. (OFF when 0 is set.)

### Performance

#### Measuring Accuracy

- Type : K, J, T, E, PLII
  - Less than -100°C (-148°F) :  $\pm 2.0^\circ\text{C}$  ( $\pm 3.6^\circ\text{F}$ )
  - 100 to 333°C (-148 to 633.2°F) :  $\pm 1.0^\circ\text{C}$  ( $\pm 1.8^\circ\text{F}$ )
  - More than 334°C (633.2°F) :  $\pm (0.3\% \text{ of Reading} + 1 \text{ digit})$
- Type : N, S, R, W5Re/W26Re
  - Less than 667°C (1232.6°F) :  $\pm 2.0^\circ\text{C}$  ( $\pm 3.6^\circ\text{F}$ )
  - More than 667°C (1232.6°F) :  $\pm (0.3\% \text{ of Reading} + 1 \text{ digit})$
- Type : B
  - Less than 400°C (752°F) :  $\pm 70.0^\circ\text{C}$  ( $\pm 126^\circ\text{F}$ )
  - 400 to 666°C (752 to 1232.6°F) :  $\pm 2.0^\circ\text{C}$  ( $\pm 3.6^\circ\text{F}$ )
  - More than 667°C (1232.6°F) :  $\pm (0.3\% \text{ of Reading} + 1 \text{ digit})$
- Cold junction temperature compensation error
  - $\pm 1.0^\circ\text{C}$  ( $\pm 1.8^\circ\text{F}$ ) [at  $23^\circ\text{C} \pm 2^\circ\text{C}$  ( $73.4^\circ\text{F} \pm 3.6^\circ\text{F}$ )]
  - Within  $\pm 1.5^\circ\text{C}$  ( $\pm 2.7^\circ\text{F}$ ) [Between -10 and 50°C (14 and 122°F)]
- b) RTD
  - Less than 266°C (510.8°F) :  $\pm 0.8^\circ\text{C}$  ( $\pm 1.4^\circ\text{F}$ )
  - More than 267°C (512.6°F) :  $\pm (0.3\% \text{ of Reading} + 1 \text{ digit})$
- c) DC voltage and DC current
  - $\pm 0.3\%$  of span

#### Insulation Resistance

More than  $20\text{M}\Omega$  (500V DC) between each isolation block

#### Dielectric Strength

More than 600V AC for one minute between each isolation block

### Control

#### Control Method

- Brilliant PID control (with autotuning)
    - Direct action/Reverse action is selectable.
    - ON/OFF action is selectable.
  - Heat/Cool Brilliant PID control (with autotuning)
    - Air cooling/Water cooling is selectable.
  - Major Setting Range**
    - Set value :
    - Proportional band :
    - Cool side proportional band :
    - Integral time :
    - Derivative time :
    - Control response :
- |  |  |
|--|--|
| Same as input range.                           |  |
| 0 to input span (Temperature)                  |  |
| 0.0 to 100.0% of input span (Voltage, Current) |  |
| (ON/OFF action when P=0)                       |  |
| 0 to input span (Temperature)                  |  |
| 0.0 to 100.0% of input span (Voltage, Current) |  |
| 1 to 3600 sec.                                 |  |
| 0 to 3600 sec.                                 |  |
| Slow, Medium, Fast                             |  |

- Output limiter : -5.0 to +105.0% (High/Low individual setting)
- Proportional cycle time : 1 to 100 sec. (Heat/Cool individual setting)
- Other setting : Auto/Manual selectable

#### Control Output

- Relay output : Form A contact, 250V AC 3A (resistive load)
- Voltage pulse output : 0/12V DC  
(Load resistance : More than  $600\Omega$ )
- Current output : 0 to 20mA, 4 to 20mA DC  
(Load resistance : Less than  $600\Omega$ )
- Continuous voltage output : 0 to 5V, 0 to 10V, 1 to 5V DC  
(Load resistance : More than  $1k\Omega$ )

### Alarms

#### Event (Alarm ) Output

- a) Number of alarms : Up to 2 points / ch
- b) Type :
  - Deviation High, Low, High/Low, Band,
  - Process High, Low
  - Hold action is available except for Band.
  - Alarm is interlock and delay timer is available.
- c) Setting range : Deviation alarm : -span to +span
- d) Differential gap : Deviation High/Low, Band : 0 to span
- e) Output : Process alarm : Same as input range

#### Loop break alarm (LBA)

- a) Number of alarms : 2 points (1 point/ch)
- b) LBA time setting : 0 to 7200 sec. (LBA is OFF when 0 is set)
- c) LBA deadband : 0 to input span
- d) Output : Communication data or event output (Option)

#### Heater Break Alarm (HBA)

- a) Number of alarms : 2 points (1 point/ch)
- b) CT type : CTL-6-P-N (30A), CTL-12-S56-10L-N (100A)  
(Specify when ordering)
- c) Display range : 0.0 to 100.0A
  - Heater break alarm function is OFF when 0.0 setting.
- d) Accuracy :  $\pm 5\%$  of input value or  $\pm 2\text{A}$  (whichever is larger)
- e) Output : Communication data or event output (Option)

### Communications

- a) Communication method : Based on RS-485 (2-wire)

- b) Communication speed : 2400, 9600, 19200, 38400 BPS

- c) Protocol : ANSI X3.28(1976) 2.5 A4 MODBUS

#### d) Bit format

- Start bit : 1
- Data bit : 7 or 8 •For MODBUS 8 bit only
- Parity bit : Without, Odd or Even

- Stop bit : 1

- e) Communication code : ASCII(JIS) 7-bit code

- f) Maximum connection : 31 (Address can be set from 0 to 99.)

### Event Inputs

(Optional)

#### Number of Inputs

1 point

#### Event Input Type

- a) RUN/STOP switching (OPEN : STOP, CLOSE : RUN)
- b) Alarm interlock release (CLOSE : Interlock release)

#### Input Rating

Non-voltage contact input (Source type)

OPEN :  $500\text{k}\Omega$  or more, CLOSE :  $10\Omega$  or less

Rating voltage : 24VDC, Rating current : Approx. 6mA

### Event Outputs

(Optional)

#### Number of Inputs

2 points

#### Event Output Type

Temperature alarm output, Heater break alarm output,  
Control loop break alarm output, Burnout output,  
Temperature rise completion

#### Output Rating

Relay contact output, Form A contact, 250V AC 1A (resistive load)

## Specifications

### General Specifications

#### Supply Voltage

21.6 to 26.4V DC (Ripple rate 10% p-p or less) [ Rating : 24V DC ]

#### Power Consumption

V-TIO-A/B/C/D, With event input/output : Maximum 120mA  
V-TIO-A/B/C/D, Without event input/output : Maximum 90mA

#### Power Failure Effect

A power failure of 20 msec or less will not affect the control action.

#### Operating Environments

-10 to 50°C [14 to 122°F], 5 to 95% RH (No dew condensation)  
• Absolute humidity : MAX.W.C 29g/m<sup>3</sup> dry air at 101.3kPa  
Free from corrosive gas, flammable gas and dust.

#### Memory Backup:

Backed up by non-volatile memory (EEPROM)  
Data retaining period : Approx. 10 years.  
Number of writing : Approx. 1,000,000 times

• Depending on storage and operating conditions.

#### Net Weight

V-TIO-A/C, With event input/output : 210g  
V-TIO-A/C, Without event input/output : 180g  
V-TIO-B/D, With event input/output : 200g  
V-TIO-B/D, Without event input/output : 170g

#### External Dimensions

See external dimensions.


#### Other Conditions

Free from external noise, vibration, shock and exposure to direct sunlight


### Compliance with Standards



## System Configuration

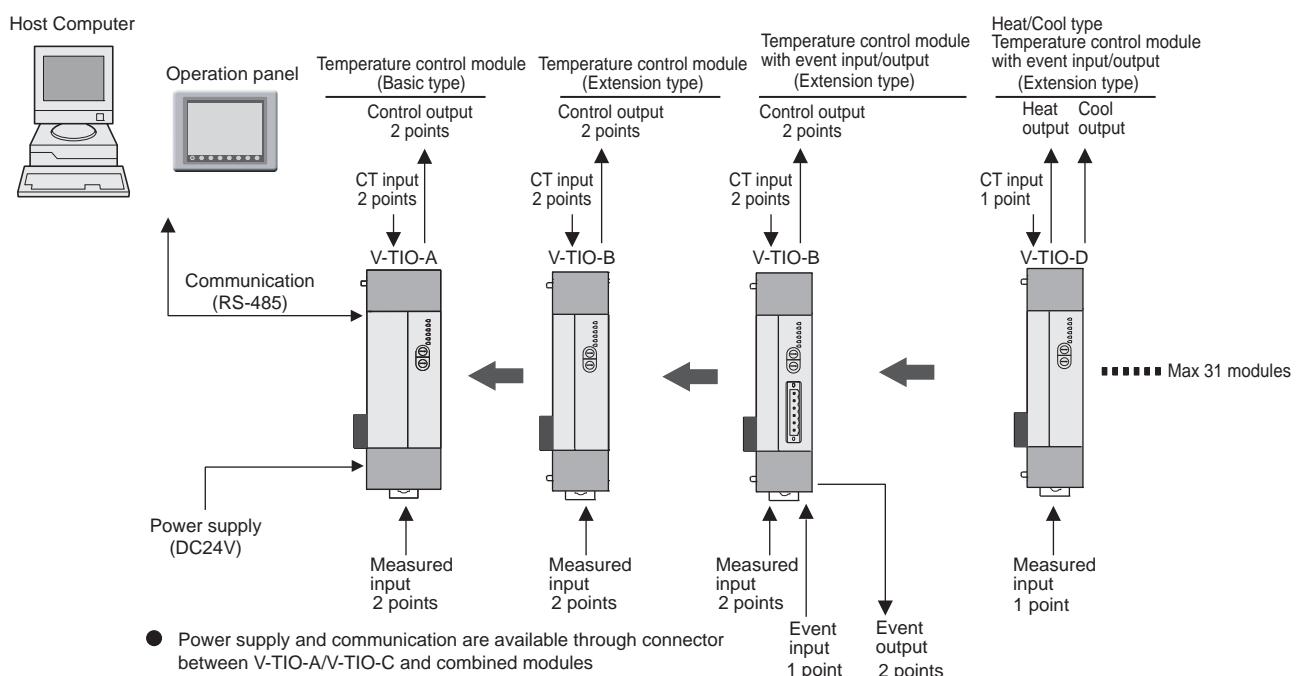

### Example of distributed installation

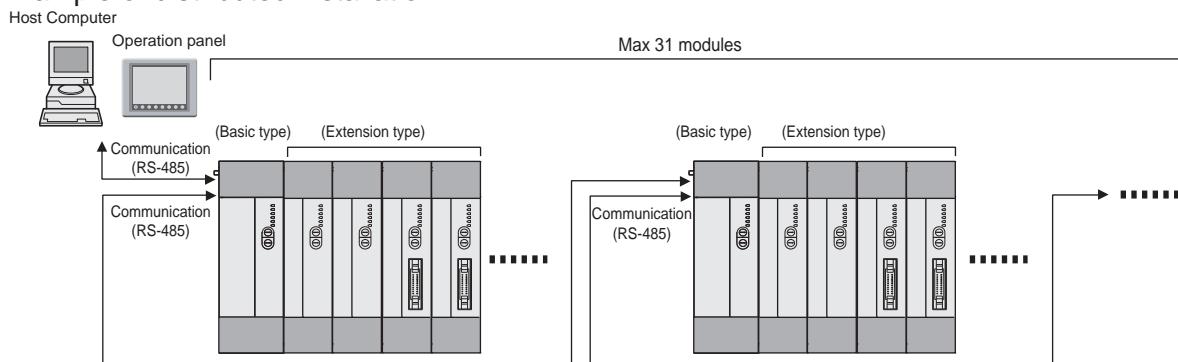

# Module type Digital Temperature Controller SRV

## Model and Suffix Code

### Temperature Control Module

Specifications	Model and Suffix Code							
Model	V-TIO	-	□	□	□	□	*	□
Type	Basic type Extension type	A B						
Control method	PID control with AT (reverse action) PID control with AT (direct action)	F D						
Measured input	See Range and Input Code Table (Common to CH1 and CH2)	□□□						
Control output 1 (CH1)	Relay output Voltage pulse DC voltage : 0 to 5V DC voltage : 0 to 10V DC voltage : 1 to 5V DC current : 0 to 20mA DC current : 4 to 20mA	M V 4 5 6 7 8						
Control output 2 (CH2)	See control output 1 code	□						
Event input (DI)	No event input RUN/STOP Alarm interlock release	N 1 2						
Event output (DO1)	No event output See event output code table	N N □□						
Event output (DO2)	No event output See event output code table	N N □□						
CT type *1	CTL-6-P-N (0 to 30A) CTL-12-S56-10L-N (0 to 100A)	P S						
Digital communications	RS-485 (RKC standard/ANSI) RS-485 (MODBUS)	5 6						

\*1 Please specify "P" for CT type selection when control output is DC voltage or DC current. HBA does not operate with DC voltage or DC current outputs.

### Temperature Control Module (Heat/Cool control type)

Specifications	Model and Suffix Code							
Model	V-TIO	-	□	□	□	□	*	□
Type	Basic type Extension type	C D						
Control method	Heat/Cool PID control with AT (water cooling) Heat/Cool PID control with AT (air cooling)	W A						
Measured input	See Range and Input Code Table	□□□						
Heat output	Relay output Voltage pulse DC voltage : 0 to 5V DC voltage : 0 to 10V DC voltage : 1 to 5V DC current : 0 to 20mA DC current : 4 to 20mA	M V 4 5 6 7 8						
Cool output	See heat output code	□						
Event input (DI)	No event input RUN/STOP Alarm interlock release	N 1 2						
Event output (DO1)	No event output See event output code table	N N □□						
Event output (DO2)	No event output See event output code table	N N □□						
CT type *1	CTL-6-P-N (0 to 30A) CTL-12-S56-10L-N (0 to 100A)	P S						
Digital communications	RS-485 (RKC standard/ANSI) RS-485 (MODBUS)	5 6						

\*1 Please specify "P" for CT type for control output type is continuous voltage or current output, although Heater break alarm available with those types of output.

## Model and Suffix Code

### Range and Input Code Table

Thermocouple and Low voltage group (Field-programmable)

Input	Code	Range
K	K 02	0 – 400°C
	K 04	0 – 800°C
	K 16	-200 – 1372°C
	K 09	0.0 – 400.0°C
	K 35	-200.0 – 400.0°C
	K B9	32 – 752°F
	K B8	32 – 1472°F
	K B7	-328 – 2501°C
	K C2	32.0 – 752.0°C
	K C1	-328.0 – 752.0°C
J	J 02	0 – 400°C
	J 04	0 – 800°C
	J 15	-200 – 1200°C
	J 09	0.0 – 400.0°C
	J 27	-200.0 – 400.0°C
	J C2	32 – 752°F
	J C1	32 – 1472°F
	J B9	-328 – 2192°F
	J C4	32.0 – 752.0°F
	J C3	-328.0 – 752.0°F
R	R 06	0 – 1768°C
	R A6	32 – 3214°F
S	S 05	0 – 1768°C
	S A6	32 – 3214°F

Input	Code	Range
B	B 03	0 – 1800°C
	B B1	32 – 3272°F
	E 01	0 – 800°C
	E 02	0 – 1000°C
	E A8	32 – 1472°F
	E A7	32 – 1832°F
	N 02	0 – 1300°C
	N A6	32 – 2372°F
	T 08	0 – 400°C
	T 09	0 – 200°C
T	T 16	-200 – 400°C
	T 06	0.0 – 400.0°C
	T 19	-200.0 – 400.0°C
	T B9	32 – 752°F
	T C1	32 – 392°F
	T B8	-328 – 752°F
	T C3	32.0 – 752.0°F
	T C2	-328.0 – 752.0°F
	W 03	0 – 2300°C
	W A9	32 – 4172°F
W5Re W26Re	A 02	0 – 1390°C
	A A2	32 – 2534°F
PL II	0-100mVDC	Programmable
	2 01	Programmable

RTD group (Field-programmable)

Input	Code	Range
Pt100	D 17	0 – 400°C
	D 33	0 – 850°C
	D 16	0.0 – 400.0°C
	D 28	-200.0 – 400.0°C
	D C5	32 – 752°F
	D C4	32 – 1562°F
	D C7	32.0 – 752.0°F
	D C6	-328.0 – 752.0°F
	P 17	0 – 400°C
	P 23	0 – 600°C
JPt100	P 16	0.0 – 400.0°C
	P 28	-200.0 – 400.0°C

Voltage and Current group (Field-programmable)

Input	Code	Range
0-5V DC	4 01	
0-10V DC	5 01	
1-5V DC	6 01	Programmable
0-20mA DC	7 01	
4-20mA DC	8 01	

### Event output Code Table

CH1 Event type

Code	Type
1A	CH1 Deviation High
1B	CH1 Deviation Low
1C	CH1 Deviation High/Low
1D	CH1 Band Alarm
1E	CH1 Deviation High with Hold
1F	CH1 Deviation Low with Hold
1G	CH1 Deviation High/Low with Hold
1H	CH1 Process High
1J	CH1 Process Low
1K	CH1 Process High with Hold
1L	CH1 Process Low with Hold
1Q	CH1 Deviation High with Re-Hold
1R	CH1 Deviation Low with Re-Hold
1T	CH1 Deviation High/Low with Re-Hold
1P	CH1 Heater break alarm 2
11	CH1 Control Loop Break Alarm 3
12	CH1 Burnout Alarm
13	CH1 Temperature rise completion

CH2 Event type

Code	Type
2A	CH2 Deviation High
2B	CH2 Deviation Low
2C	CH2 Deviation High/Low
2D	CH2 Band Alarm
2E	CH2 Deviation High with Hold
2F	CH2 Deviation Low with Hold
2G	CH2 Deviation High/Low with Hold
2H	CH2 Process High
2J	CH2 Process Low
2K	CH2 Process High with Hold
2L	CH2 Process Low with Hold
2Q	CH2 Deviation High with Re-Hold
2R	CH2 Deviation Low with Re-Hold
2T	CH2 Deviation High/Low with Re-Hold
2P	CH2 Heater break alarm 2
21	CH2 Control Loop Break Alarm
22	CH2 Burnout Alarm
23	CH2 Temperature rise completion

1 For heat/cool control, use table 1 to select event type.

2 Current transformer (sold separately, See Accessories) is required to use Heater Break Alarm. HBA can operate with relay or voltage pulse output only.

3 Control Loop Break Alarm is not available with heat/cool PID control type.

### Accessories

Connector (plug) for event input/output

Front screw type : SRVP-01  
(An equivalent product : FRONT-MSTB 2,5/6-STF-5,08, PHOENIX CONTACT)

Side screw type : SRVP-02  
(An equivalent product : MSTB 2,5/6-STF-5,08, PHOENIX CONTACT)




Current transformer for heater break alarm


CTL-6-P-N : 0 to 30A

CTL-12-S56-10L-N : 0 to 100A

## External Dimensions and Rear Terminals

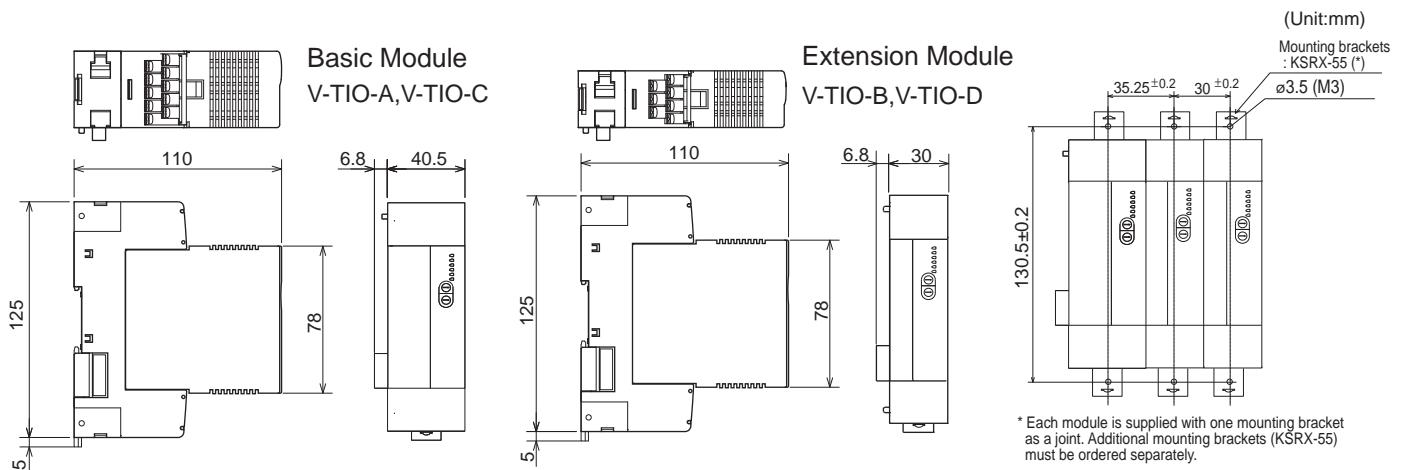



**Basic Module  
V-TIO-A, V-TIO-C**



16 15 3 2 1	16 17 15	7 3 6	2 5	1 4
T/R(A) SG T/R(B)	RS-485	CT1 CT2 CT1 : CH1 CT2 : CH2	NO OUT1 Relay contact	NO OUT2 Relay contact
			OUT1 -	OUT2 -
			Voltage pulse/ Voltage/Current	Voltage pulse/ Voltage/Current
			V-TIO-A Control output 1 (CH1)	V-TIO-A Control output 2 (CH2)
			V-TIO-C Heat side Control output	V-TIO-C Cool side Control output


\* CT2 is not available for heat/cool control type.

CT input for heater break alarm

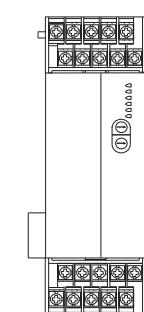

**Connector (Event input/output)**

V-TIO-A, V-TIO-B  
V-TIO-C, V-TIO-D

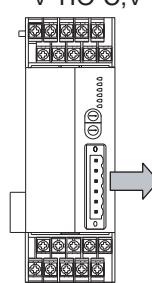


1	- DI	Event input Non-voltage input
2	+ DI	

3	- D01	Event output 1 Relay contact output
4	+ D01	

5	- D02	Event output 2 Relay contact output
6	+ D02	


**Extension Module  
V-TIO-B, V-TIO-D**




3 2 1	7 6	2 5	1 4
	CT1 CT2 CT1 : CH1 CT2 : CH2	NO OUT1 Relay contact	NO OUT2 Relay contact
		OUT1 -	OUT2 -
		Voltage pulse/ Voltage/Current	Voltage pulse/ Voltage/Current
		V-TIO-B Control output 1 (CH1)	V-TIO-B Control output 2 (CH2)
		V-TIO-D Heat side Control output	V-TIO-D Cool side Control output

\* CT2 is not available for heat/cool control type.

CT input for heater break alarm

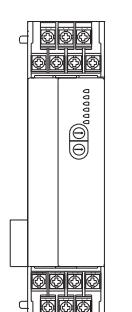

11	14 10 13	9 12 8	11
	A B B RTD1 RTD	B A RTD2 RTD	
	TC1 Thermocouple	TC2 Thermocouple	
	+ IN1 - Voltage/Current	+ IN2 - Voltage/Current	
	V-TIO-A Measured input 1 (CH1)	V-TIO-A Measured input 2 (CH2)	
	V-TIO-C Measured input	V-TIO-C Measured input	



(Example: when a connector SRVP-01 is used with a module with digital input/digital output functions).

