

High Temp./High Pressure Washdown Safe LED Work Light

CLE

- CE
- RoHS 10
- IP65F
- Indoor/Outdoor Use
- All Mounting Directions
- Ambient Temperature -25°C~+60°C



CLE-24 (Wide Angle Type)



CLE-24N (Narrow Angle Type)


Model Number Configuration

CLE-24N

① ②

- ① Rated Voltage
24 = 24V DC
- ② Irradiation Type
Blank = Wide Angle Type
N = Narrow Angle Type

Dimensions (mm)

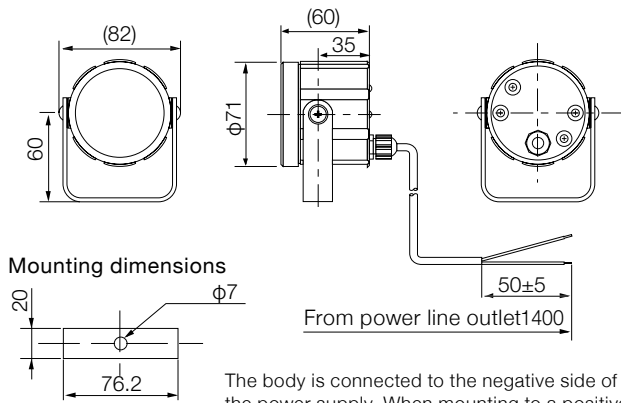

The body is connected to the negative side of the power supply. When mounting to a positive ground device, insulate the mounting bracket.

Specification

Luminous Intensity

Blank: 25cd or more
N: 160cd or more

Product List

Model Number	Lens	Rated Voltage	Power Consumption	Mass
CLE-24	Translucent	24V DC	1.3W	0.3kg
CLE-24N	Clear	24V DC	1.3W	0.3kg